



● Radial Taping Specifications


TAF: 4~8φ

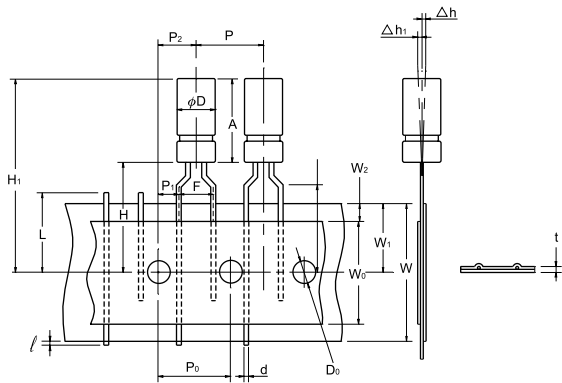


TAS: 4~8φ

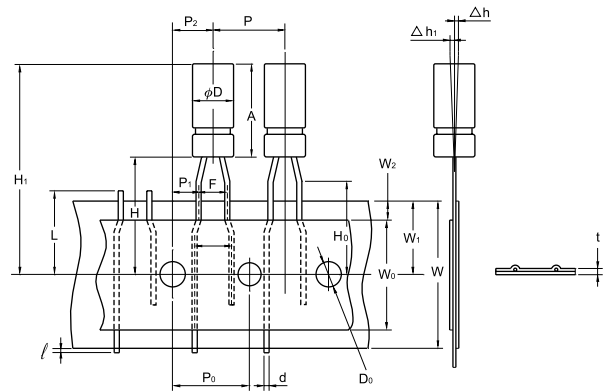

TAS: 10~13φ

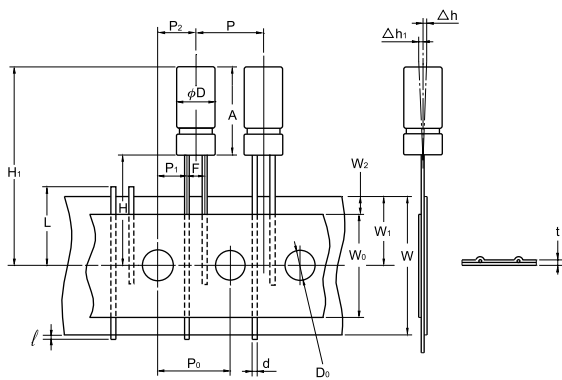

TAS: 16~18φ

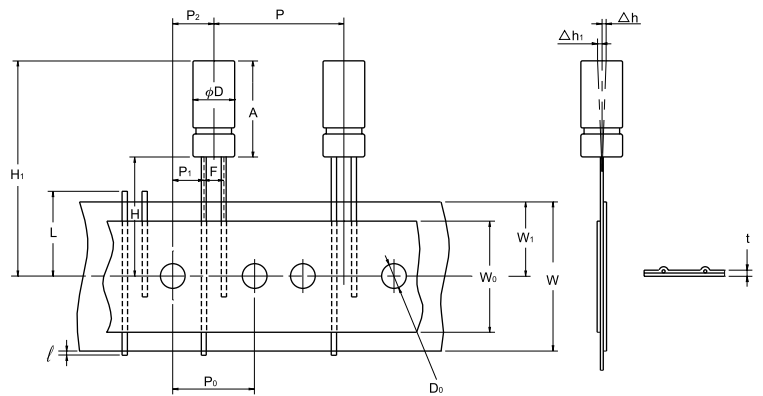

● Dimensions

item	Type	Forming Lead Type			Straight Lead Type								Tolerance
	Code	TAF			TAS								
	Diameter	4φ	5φ~6.3φ	8φ	4φ	5φ	6.3φ	8φ	10φ	13φ	16φ	18φ	
Lead wire diameter	φd	0.45	0.5		0.45	0.5			0.6	0.6	0.8		± 0.05
Intervals of bodies	P	12.7			12.7			15.0		30.0			± 1.0
Intervals of feeding holes	P ₀	12.7			12.7			15.0					± 0.2
Feeding hole off alignment	P ₁	3.85			5.1		4.6	3.85	5.0	3.75			± 0.7
Feeding hole off alignment	P ₂	6.35			6.35			7.5					± 1.0
Lead center spacing	F	5.0			2.5		3.5	5.0	5.0	7.5			+ 0.8- 0.2
Base tape width	W	18.0			18.0								± 0.5
Adhesive tape width	W ₀	12.5			12.5			15.0					Min.
Feeding hole off alignment	W ₁	9.0			9.0								± 0.5
Adhesive tape off alignment	W ₂	1.5			1.5								Max.
Body (Bottom) height	H	17.5	18.5	20.0	18.5			18.5					± 0.75
Lead clinch height	H ₀	16.0			-								± 0.5
Cut lead height	ℓ	1.0			1.0								Max.
Feeding hole diameter	φD ₀	4.0			4.0								± 0.2
Body inclination	Δh	0			0								± 2.0
Body inclination	Δh ₁	0			0								± 2.0
Total tape thickness	t	0.7			0.7								± 0.2